Part No.	(5)Length	Part No.	(5)Length
3605-1	1M	3605-5	5M
3605-2	2M	3605-10	10M
3605-3	3M		

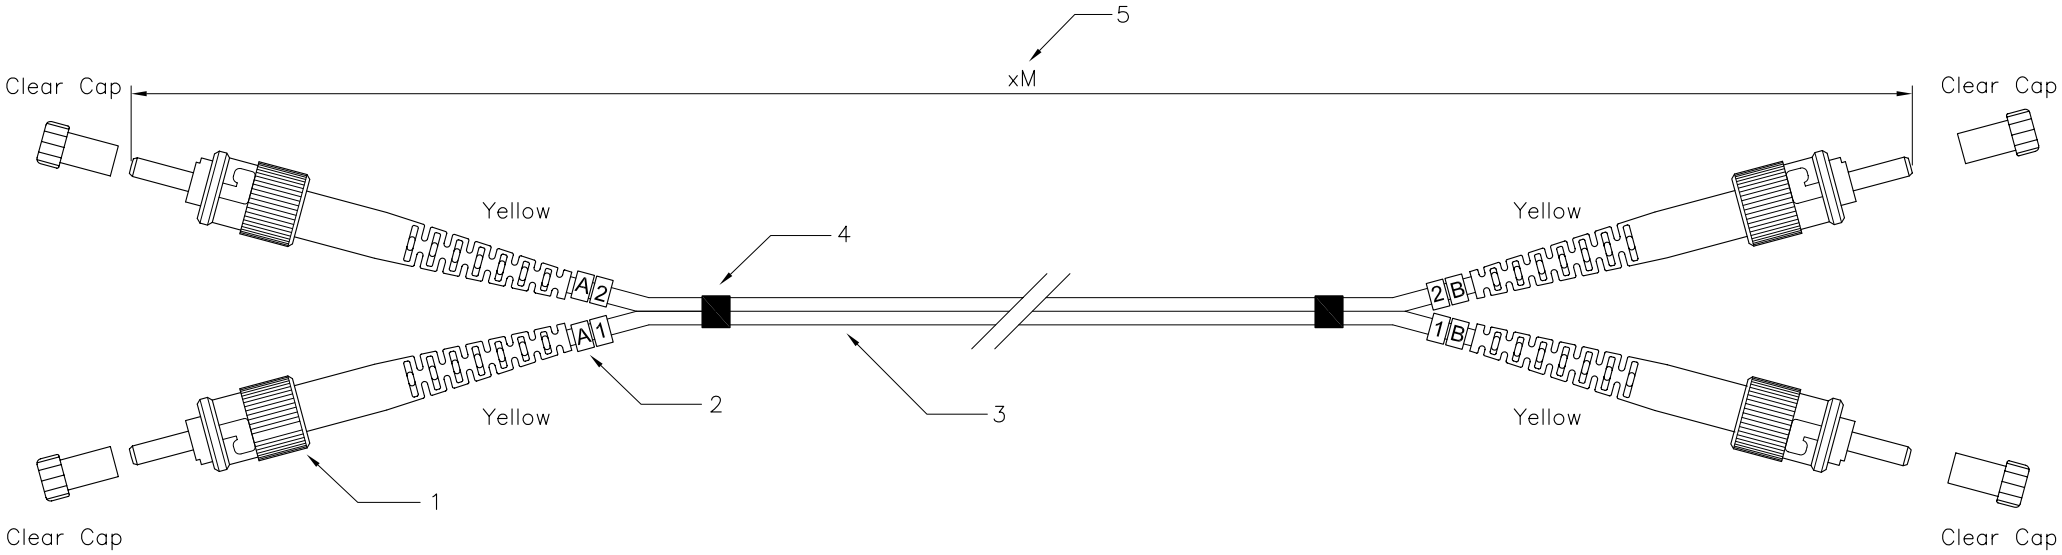

Specification:

Material:

1. Connector Type : ST/PC Singlemode
2. Cable Marker
3. Cable Type :
   3-1. Zipcord cable, ø3.0mm, 9/125um Singlemode,
   3-2. Calbe Jacket : Yellow color, LSZH material
4. Shrink Tube
5. Length : xM

Performance:

a. Insertion Loss : <0.3 dB
b. Return Loss : >40 dB
c. Fiber Extention : −0.05um < H < +0.05um
d. Ferrule End-face Radius : 10 < R < 25mm
e. Apex Offset : < 50um
f. Increase in insertion loss after 500 mating : 0.2 dB Max.
g. Operation Temperature : −20°C to +70°C
h. Storage Temperature : −40°C to +80°C

RoHS Compliant

UNIT M/M	DSGN	CSQ	30.MAY.2007	ITEM NO: 3605
SCALE 1/1	CHK	Maer	30.MAY.2007	ST to ST Duplex patch cord
DWG NO: 3605	APPR	Yty	30.MAY.2007	**Videk Ltd**